


DYNAPAC

CC102

Tandem Asphalt Roller



Technical data

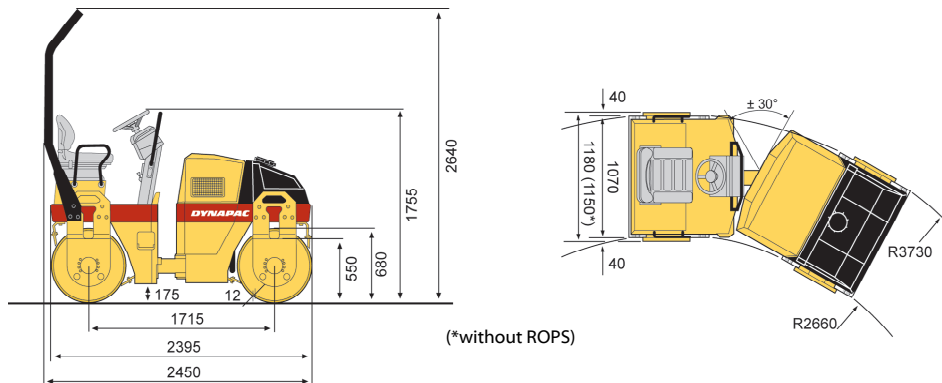

Masses (kg)

Max. operating mass	2460
Operating mass (incl. ROPS)	2350
Drum module mass, front / rear	1130/1220

Traction

Speed range (km/h)	0 - 10
Vertical oscillation (°)	±10
Theor. gradeability (%)	50

Compaction

Static linear load, front / rear (kg/cm)	10,6/11,4
Nominal amplitude (mm)	0,5
Vibration frequency (Hz)	57
Centrifugal force per drum (kN)	23
Water tank (l)	160

Engine

Model	Deutz F2L 2011
Type	Air cooled Diesel
Rated power, SAE J1995, at 2800 rpm, kW (hp)	23 (29)
Fuel tank capacity (l)	50

Hydraulic system

Driving	Axial piston pump with variable displacement and servo. 2 radial piston motors with constant displacement.
Vibration	Gear pump/motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/Emergency brake	Failsafe multidisc brake in both drums.

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.