
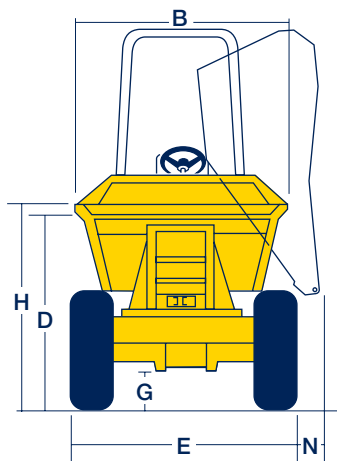


# Alldrive 5 Tonne Powerswivel

## Specifications

| Dimensions<br>(mm) |      |
|--------------------|------|
| A                  | 4752 |
| B                  | 2135 |
| C                  | 2190 |
| D                  | 1615 |
| E                  | 2100 |
| F                  | 2480 |
| G                  | 320  |
| H                  | 1795 |
| I                  | 1167 |
| J                  | 1050 |
| K                  | 540  |
| L                  | 3650 |
| M                  | 2170 |
| N                  | 140  |
| P                  | 3320 |

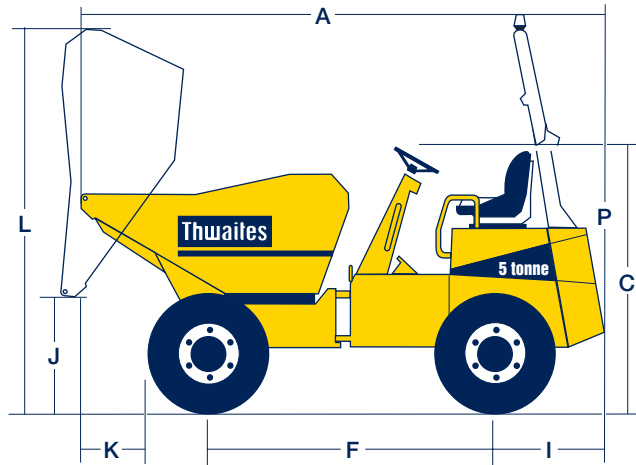

| Model                   | Max. Safe Load<br>Tonnes | Skip      |              |           |        | Drive | Transmission       |            |
|-------------------------|--------------------------|-----------|--------------|-----------|--------|-------|--------------------|------------|
|                         |                          | Front Tip | Power Swivel | Hi Swivel | Hi Tip |       | Powershuttle       | Powershift |
| Alldrive 9              | 9                        | •         |              |           |        | 4x4   | •                  | •          |
| Alldrive 7              | 7                        | •         |              |           |        | 4x4   | •                  | •          |
| Alldrive 6              | 6                        | •         | •            |           |        | 4x4   | •                  | •          |
| Alldrive 5              | 5                        | •         | •            |           |        | 4x4   | •                  | •          |
| Alldrive 4.5            | 4.5                      | •         | •            |           |        | 4x4   | Hydrostatic        |            |
| Alldrive 4              | 4                        | •         | •            |           |        | 4x4   | Manual             |            |
| Alldrive 3.5            | 3.5                      | •         | •            | •*        |        | 4x4   | Hydrostatic        |            |
| Alldrive 3              | 3                        | •         | •            | •         |        | 4x4   | Manual             |            |
| Alldrive 2.3            | 2.3                      | •         | •            |           |        | 4x4   | Hydrostatic        |            |
| Alldrive 2              | 2                        | •         | •            |           |        | 4x4   | Manual/Hydrostatic |            |
| Alldrive 1.5            | 1.5                      |           |              | •         |        | 4x4   | Manual/Hydrostatic |            |
| Alldrive 1              | 1                        |           |              |           | •      | 4x4   | Hydrostatic        |            |
| Slimline                | 1.75/1.5                 | •         | •            |           |        | 4x2   | Manual             |            |
| Nimline<br>Manual Start | 1<br>Gravity Tip         | •         |              |           |        | 4x2   | Manual             |            |

\* 3 Tonne Max. safe load

# Alldrive 5 Tonne Powerswivel

## Specifications

|                   |                |             |
|-------------------|----------------|-------------|
| <b>Capacities</b> | Max. safe load | 5000 kg     |
|                   | Heaped         | 3000 litres |
|                   | Struck         | 2200 litres |
|                   | Water          | 1500 litres |

### Engine

Perkins 1100 series, 4 cylinder water-cooled direct injection diesel. 61.5kW/83 bhp (gross) at 2200 rpm, Max. torque 302 Nm (223 lbf ft). Optional turbo diesel with Powershift Transmission. 74.5 kW/100 bhp (gross) at 2200 rpm. Max torque 412 Nm (304 lbf ft). Hour meter, battery isolation switch and heavy-duty cyclonic air cleaner positioned within the lockable engine compartment.

### Noise Levels

Operator's ear 84 LpA, airborne sound power level 105 LwA (NA) (to 2000/14/EC). 106 LwA (Turbo)

### Transmission

Torque converter 4 speed forward and reverse powershuttle transmission with column-mounted directional control lever. Heavy-duty gear driven transfer box. Optional 'Powershift' transmission with changes of speed and forward/reverse direction controlled by one column-mounted lever.

|               |                     |                      |
|---------------|---------------------|----------------------|
| <b>Speeds</b> | Forward and Reverse |                      |
|               | 1                   | 4.3 km/h ( 2.7 mph)  |
|               | 2                   | 6.9 km/h ( 4.3 mph)  |
|               | 3                   | 13.0 km/h ( 8.1 mph) |
|               | 4                   | 23.9 km/h (14.8 mph) |

|              |                  |
|--------------|------------------|
| <b>Tyres</b> | 315/80 x 18      |
|              | 16 ply           |
|              | Track grip tread |

### Brakes and Axles

Twin-circuit totally enclosed multiplate oil-immersed discs mounted on both axles with automatic adjustment for wear. Hand-operated parking brake. Heavy-duty axles with epicyclic reduction and fully floating halfshafts.

### Kinglink Chassis

Front and rear chassis constructed from deep section folded steel plate, with three-point Kinglink giving centre articulation and oscillation for better stability, traction and extra safety on site. Remote greasing point provided for lubrication of top Kinglink articulation pin.

### Skip

Hydraulically operated, 8 mm steel base plate, fully welded, mouth and sides of skip reinforced with box sections giving greater strength to minimise skip damage. No material traps. Powerswivel mounted on ball bearing turntable with powered rotation through 180° by means of twin slewing cylinders, operated by a single dual-axis control lever. Automatic safety lock holds skip in central position when travelling.

### Seating & Controls

Adjustable suspension seat, accessible from both sides. Audible warning device for handbrake in 'on' position. Electric horn. Large pedal pads with handbrake and hydraulic controls ready to hand. Super bright warning lights for all critical functions.

### Service Access

Lockable 3 sided cover opens to provide easy access from ground level to engine service points, all located on the same side. Rear chassis panel can be hinged back on retainers. Additional service access door incorporates the battery. Moulded diesel and hydraulic tanks positioned low in the chassis side members, permitting access to the filler caps from ground level.

### Electrics

Wiring harness contained within conduits and all electrical components water resistant to IP65/67 standards.

### Steering & Hydraulics

Hydraulic priority power steering. Filter mounted on the top of the tank accessible from ground level. Hydraulic test point fitted as standard.

|                        |           |           |
|------------------------|-----------|-----------|
| <b>Tank Capacities</b> | Fuel      | 70 litres |
|                        | Hydraulic | 70 litres |

|                      |                                    |
|----------------------|------------------------------------|
| <b>Shipping Cube</b> | 22.2 m <sup>3</sup> (without ROPS) |
|----------------------|------------------------------------|

|                       |                        |
|-----------------------|------------------------|
| <b>Unladen Weight</b> | 4145 kg (Powershuttle) |
|                       | 4175 kg (Powershift)   |

|                           |        |
|---------------------------|--------|
| <b>Clearance Diameter</b> | 12.0 m |
|---------------------------|--------|

|                       |          |
|-----------------------|----------|
| <b>Towing Bracket</b> | Standard |
|-----------------------|----------|

### ROPS

For the UK and other markets where it is a legal requirement a fully approved ROPS frame is fitted as standard.

### Optional Extras

Folding ROPS frame. ROPS/FOPS frame and canopy. Beacon. Full road lighting equipment. UK road equipment. Anti-theft device.

Distributor



We reserve the right to change all specifications without prior notice.  
Printed in England 04/2004

# Thwaites

Thwaites Ltd. Leamington Spa, Warwickshire CV32 7NQ, England  
Tel: +44 (0)1926 422471 Fax: +44 (0)1926 337155  
[www.thwaitesdumpers.co.uk](http://www.thwaitesdumpers.co.uk)